



STORM 12



Housing and motor noise level when fan is running near maximum output

n (T/min) R.P.M.	Global dB	Global dB (A)
1450	60,4	56,8
1720	65,2	61,5
2850	76,8	74
3300	80,5	77,8

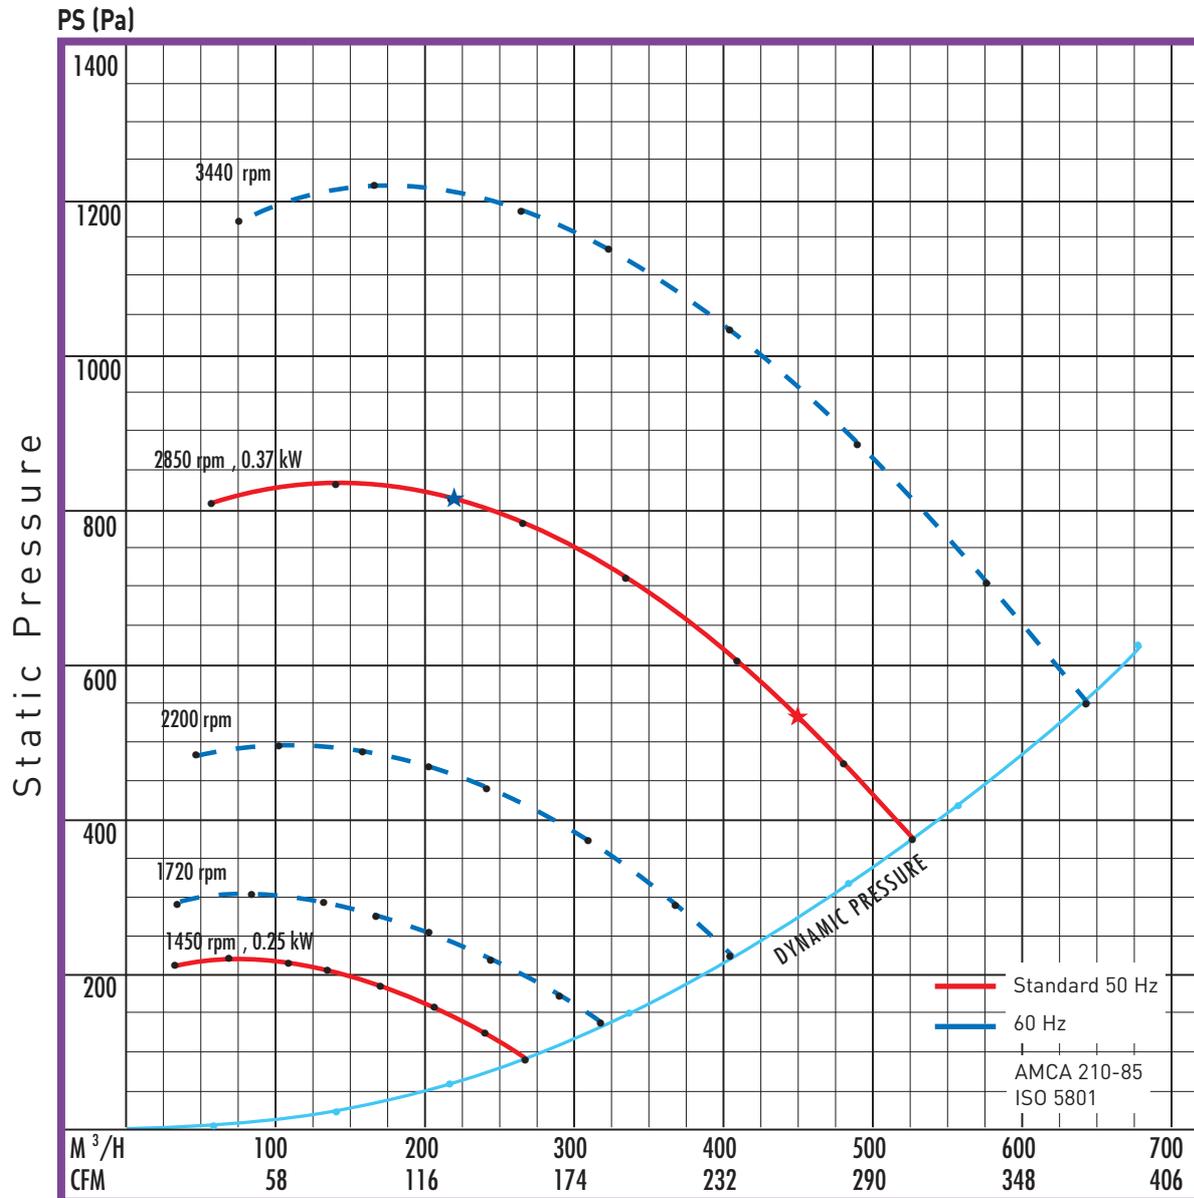

Noise level type B.
Visit our website for details.


R.P.M.	★ dB(A) ★	dB	
1450	69,9 71,7	82	83,9
1720	73,5 75,3	86,9	87,6
2850	84,2 85,8	98,7	98,1
3300	87,4 88,8	101,9	100,9

(ISO 13347)

Noise level in octaves (dB)

Frequency Hz	1450 R.P.M.	1720 R.P.M.	2870 R.P.M.	3300 R.P.M.
50	79,9	83,2	92,5	95,6
100	71,9	75,6	88,5	91,4
250	63,6	74,5	76,4	81,9
500	66,4	72,4	72,6	83,1
1000	55,7	62,5	76,4	81,9
2500	47,7	52,2	63,3	69,6
5000	43,3	47,7	62,4	66,3
10000	41,4	45,7	58	61,9

STORM 12

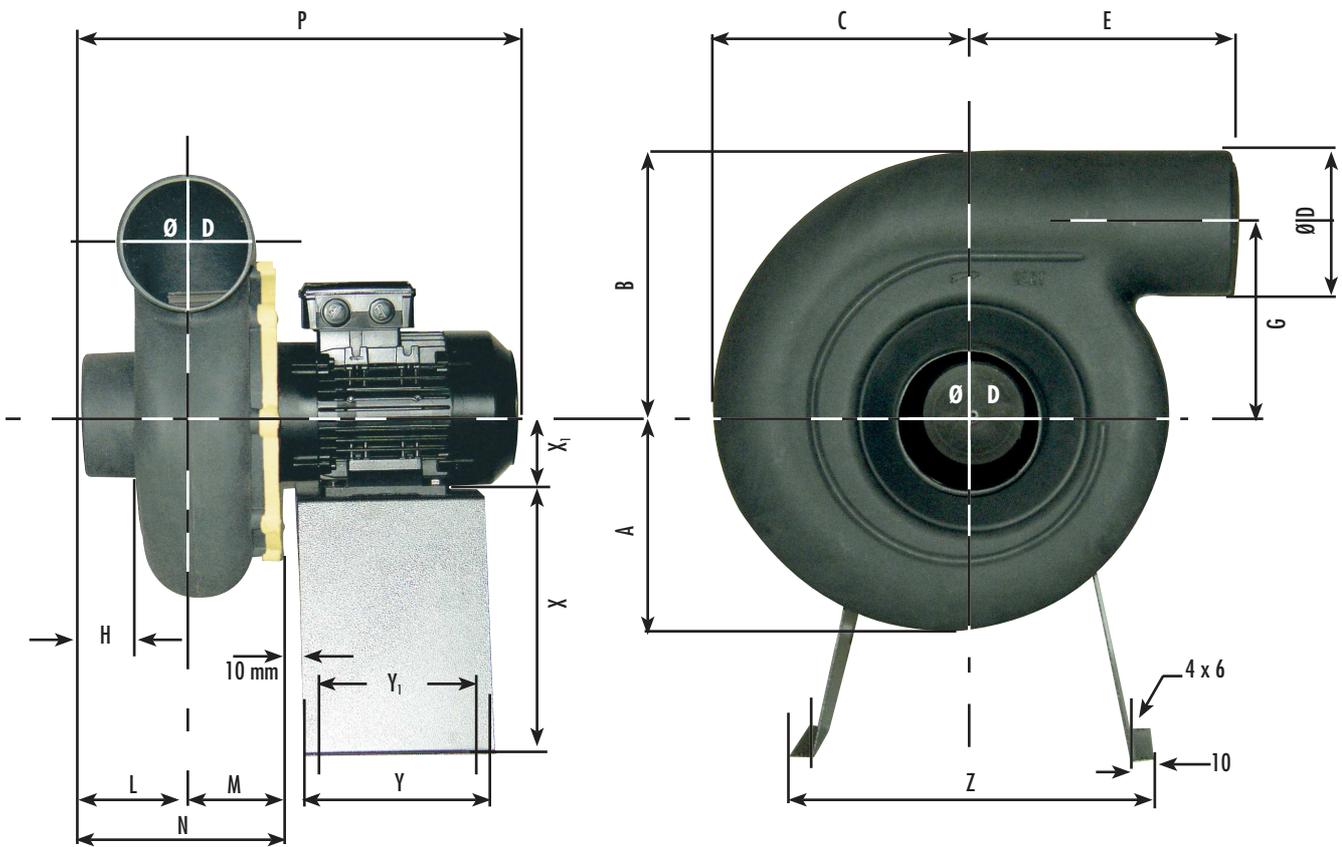

LG POSITION ONLY

Available
in **ATEX** version

Dimensional data (mm). Metal stand does not come standard with fan (see accessories pricing).
The motor frame size may vary upon type of motor used.

A	B	C	Ø D	E	G	H	L	M	N	P	Y	Y ₁	Z	X	X ₁
145	175	163	90	212	130	45	80	72	152	350	180	160	340	240	71

Handings with IP55 motor type are viewed from inlet side - 45 degree adjustable

